


Radial Leaded PPTC

FRX Series

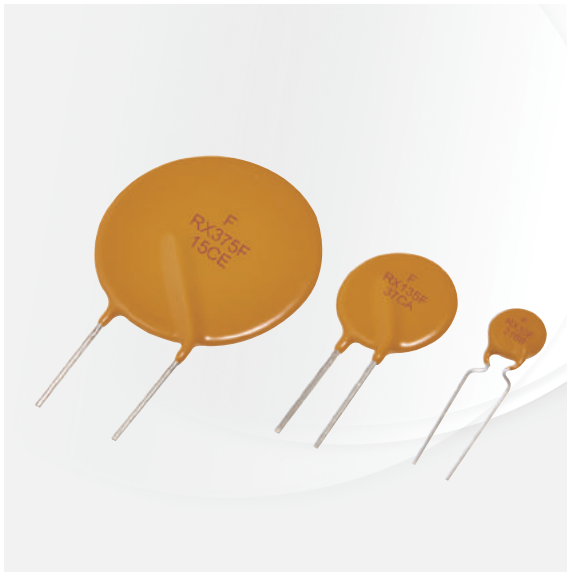

Application

Wide variety of electronic equipment

Product Features

Low hold current, Solid state Radial-leaded product ideal for up to 60V_{DC}



Operation Current

0.05A ~ 3.75A

Maximum Voltage

60V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

AGENCY	AGENCY FILE NUMBER
	UL(E211981)
	C-UL(E211981)
	TÜV (R50004084)



SVHC Compliant

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Max. Time to trip	Max. Current	Rated Voltage	Typ. Power	Resistance	
							R _{MIN}	R _{1MAX}
							Ohms	Ohms
FRX005-60F	0.05	0.10	5.0	40	60	0.26	7.30	20.00
FRX010-60F	0.10	0.20	4.0	40	60	0.38	2.50	7.50
FRX017-60F	0.17	0.34	3.0	40	60	0.48	2.00	8.00
FRX020-60F	0.20	0.40	2.2	40	60	0.41	1.83	4.40
FRX025-60F	0.25	0.50	2.5	40	60	0.45	1.25	3.00
FRX030-60F	0.30	0.60	3.0	40	60	0.49	0.88	2.10
FRX040-60F	0.40	0.80	3.8	40	60	0.56	0.55	1.29
FRX050-60F	0.50	1.00	4.0	40	60	0.77	0.50	1.17
FRX065-60F	0.65	1.30	5.3	40	60	0.88	0.31	0.72
FRX075-60F	0.75	1.50	6.3	40	60	0.92	0.25	0.60
FRX090-60F	0.90	1.80	7.2	40	60	0.99	0.20	0.47
FRX110-60F	1.10	2.20	8.2	40	60	1.50	0.15	0.38
FRX135-60F	1.35	2.70	9.6	40	60	1.70	0.12	0.30
FRX160-60F	1.60	3.20	11.4	40	60	1.90	0.09	0.22
FRX185-60F	1.85	3.70	12.6	40	60	2.10	0.08	0.19
FRX250-60F	2.50	5.00	15.6	40	60	2.50	0.05	0.13
FRX300-60F	3.00	6.00	19.8	40	60	2.80	0.04	0.10
FRX375-60F	3.75	7.50	24.0	40	60	3.20	0.03	0.08

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	158%	138%	119%	100%	90%	81%	70%	60%	50%	36%