

General Description

UAE3362 are designed by bi-direction TVS diode, to protect high speed data interfaces. This product has been specifically designed to protect sensitive components which are connected to data and transmission lines from overvoltage caused by ESD (electrostatic discharge), CDE (Cable Discharge Events), and EFT (electrical fast transients). The TVS diode prevents over-voltage on the power line, protecting any downstream components. The low capacitance configuration allows the user to protect high-speed data or transmission lines. This device is optimized for ESD protection of portable electronics. They may be used to meet the ESD immunity requirements of IEC 61000-4-2, Level 4 ($\pm 15\text{kV}$ air, $\pm 8\text{kV}$ contact discharge).

Features

- Transient protection for high-speed data lines to IEC 61000-4-2 (ESD) $\pm 15\text{kV}$ (air), $\pm 8\text{kV}$ (contact)
IEC 61000-4-4 (EFT) 40A (5/50ns)
- Small package saves board space
- Protects up to four I/O lines & power line
- Low capacitance ($<3.5\text{pF}$) for high-speed interfaces
- Low leakage current and clamping voltage
- Low operating voltage: 3.3V
- Solid-state silicon-avalanche technology

Application

- USB 2.0 Power and Data Line Protection
- Monitors and Flat Panel Displays
- Digital Visual Interface (DVI)
- 10/100/1000 Ethernet
- Notebook Computer
- SIM Ports
- ATM Interface
- IEEE 1394 Firewire Ports
- Cellular Handsets & Accessories
- Portable Instrumentation
- Digital Cameras
- MP3 Players
- Video Graphics Cards

Pin Description (SOD-323)



Schematic & PIN Configuration(SOD-323)



Ordering Information

Part Ordering No.	Part Marking	Package	Unit	Quantity
UAE3362	2	SOD-323	Tape & Reel	3000 EA

※ UAE3362 : 7" Tape & Reel ; Pb- Free ; Halogen- Free

UAE3362
One-Line ESD Protection
Low Capacitance Bi-direction TVS

ABSOLUTE MAXIMUM RATINGS

($T_A=25^\circ\text{C}$ Unless otherwise noted)

Parameter	Symbol	Typical	Unit
Peak Pulse Power ($t_p = 8/20 \mu\text{s}$)	P_{pk}	100	W
Maximum Peak Pulse Current ($t_p = 8/20 \mu\text{s}$)	I_{PP}	5	A
ESD per IEC 61000 – 4 – 2 (Air)	V_{PP}	± 15	KV
ESD per IEC 61000 – 4 – 2 (Contact)	V_{PP}	± 8	KV
Operating Junction Temperature	T_J	-55 ~ 125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ 150	$^\circ\text{C}$
Lead Soldering Temperature	T_L	260 (10sec)	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS


($T_A=25^\circ\text{C}$ Unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ	Max.	Unit
Reverse Stand – Off Voltage	V_{RWM}	Pin 1 to 2 or Pin 2 to 1			3.3	V
Reverse Breakdown Voltage	V_{BR}	$I_t = 1\text{mA}$ Pin 1 to 2 or Pin 2 to 1	3.6			V
Reverse Leakage Current	I_R	$V_{RWM} = 5\text{V}$, $T=25^\circ\text{C}$ Pin 1 to 2 or Pin 2 to 1		0.3	1.0	μA
Clamping Voltage	V_c	$I_{PP} = 1\text{A}$, $t_p = 8/20 \mu\text{s}$ Pin 1 to 2 or 2 to 1			7	V
Clamping Voltage	V_c	$I_{PP} = 5\text{A}$, $t_p = 8/20 \mu\text{s}$ Pin 1 to 2 or 2 to 1			12	V
Junction Capacitance	C_j	$V_R = 0\text{V}$, $f = 1\text{MHz}$		2	3.5	pF


UAE3362
One-Line ESD Protection
Low Capacitance Bi-direction TVS

Typical Characteristics


Non-Repetitive Peak Pulse Power vs. Pulse Time

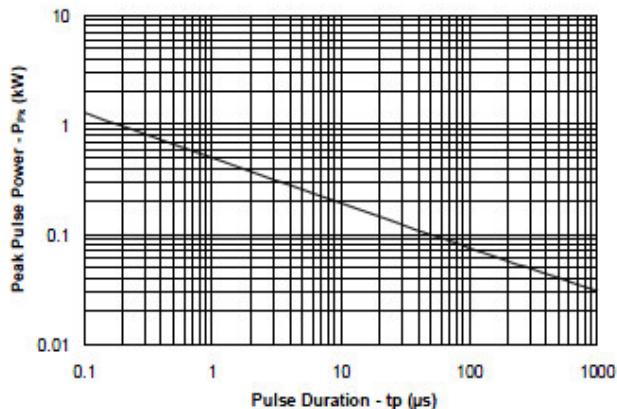


Power Derating Curve

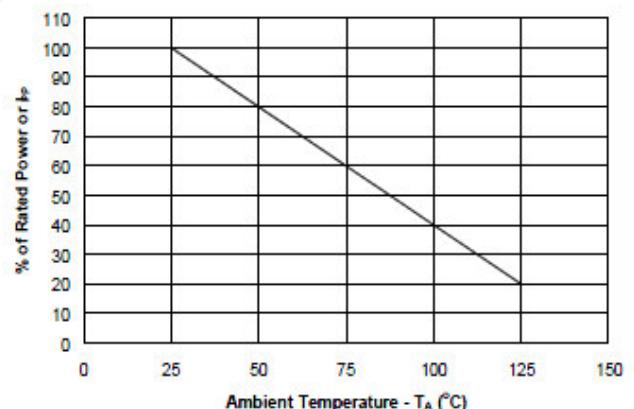

Pulse Waveform

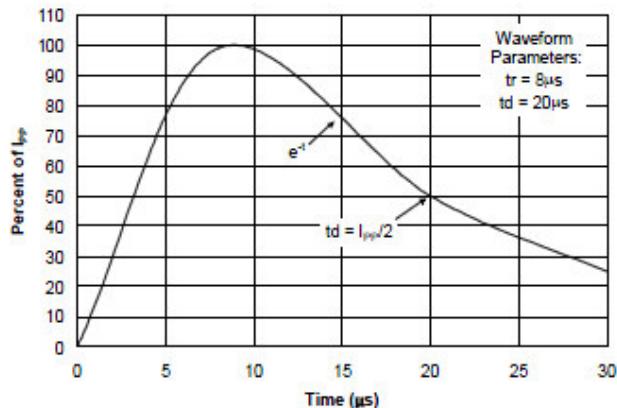

Forward Voltage vs. Forward Current

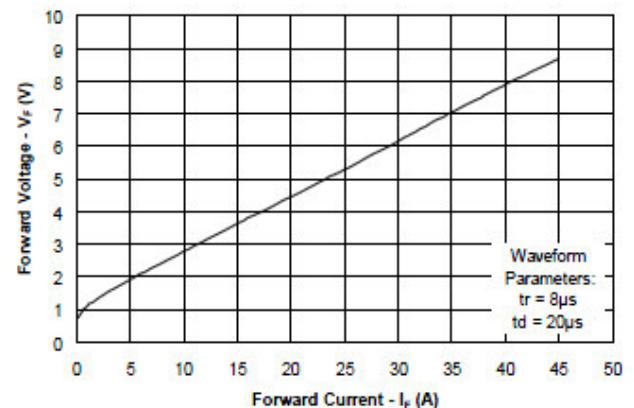

UAE3362

One-Line ESD Protection

Low Capacitance Bi-direction TVS

Application Information

Device Connection Options

These TVS diodes are designed to protect one data, I/O, or power supply line. The device is bi-directional and may be used on lines where the signal polarity can go above and below ground.


Circuit Board Layout Recommendations for Suppression of ESD.

Good circuit board layout is critical for the suppression of ESD induced transients. The following guidelines are recommended :

- Place the TVS near the input terminals or connectors to restrict transient coupling.
- Minimize the path length between the TVS and the protected line.
- Minimize all conductive loops including power and ground loops.
- The ESD transient return path to ground should be kept as short as possible.
- Never run critical signals near board edges.
- Use ground planes whenever possible.

UAE3362
One-Line ESD Protection
Low Capacitance Bi-direction TVS

Package Information (SOD-323)

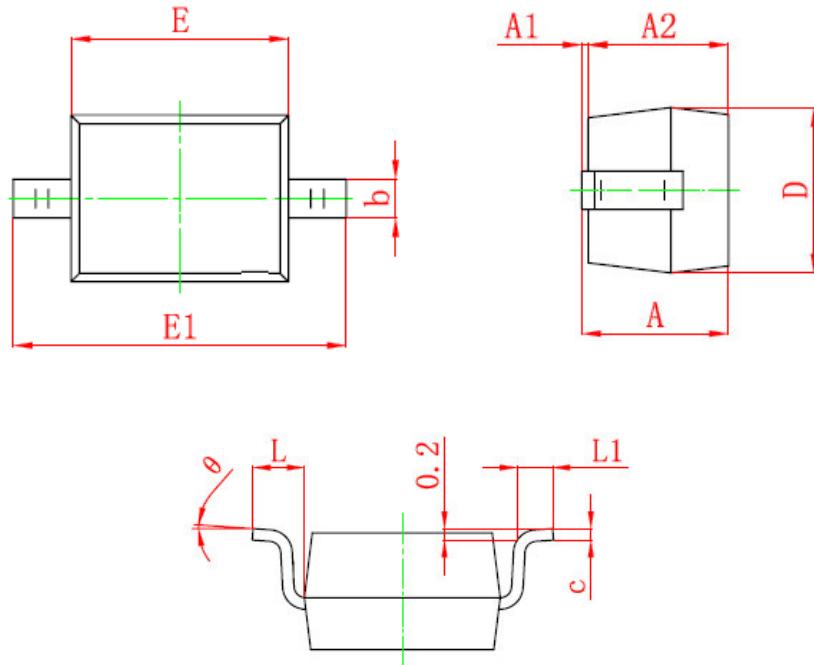

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A		1.000		0.039
A1	0.000	0.100	0.000	0.004
A2	0.800	0.900	0.031	0.035
b	0.250	0.350	0.010	0.014
c	0.080	0.150	0.003	0.006
D	1.200	1.400	0.047	0.055
E	1.600	1.800	0.063	0.071
E1	2.500	2.700	0.098	0.106
L	0.475 REF		0.019 REF	
L1	0.250	0.400	0.010	0.016
θ	0°	8°	0°	8°